

Fig. 1

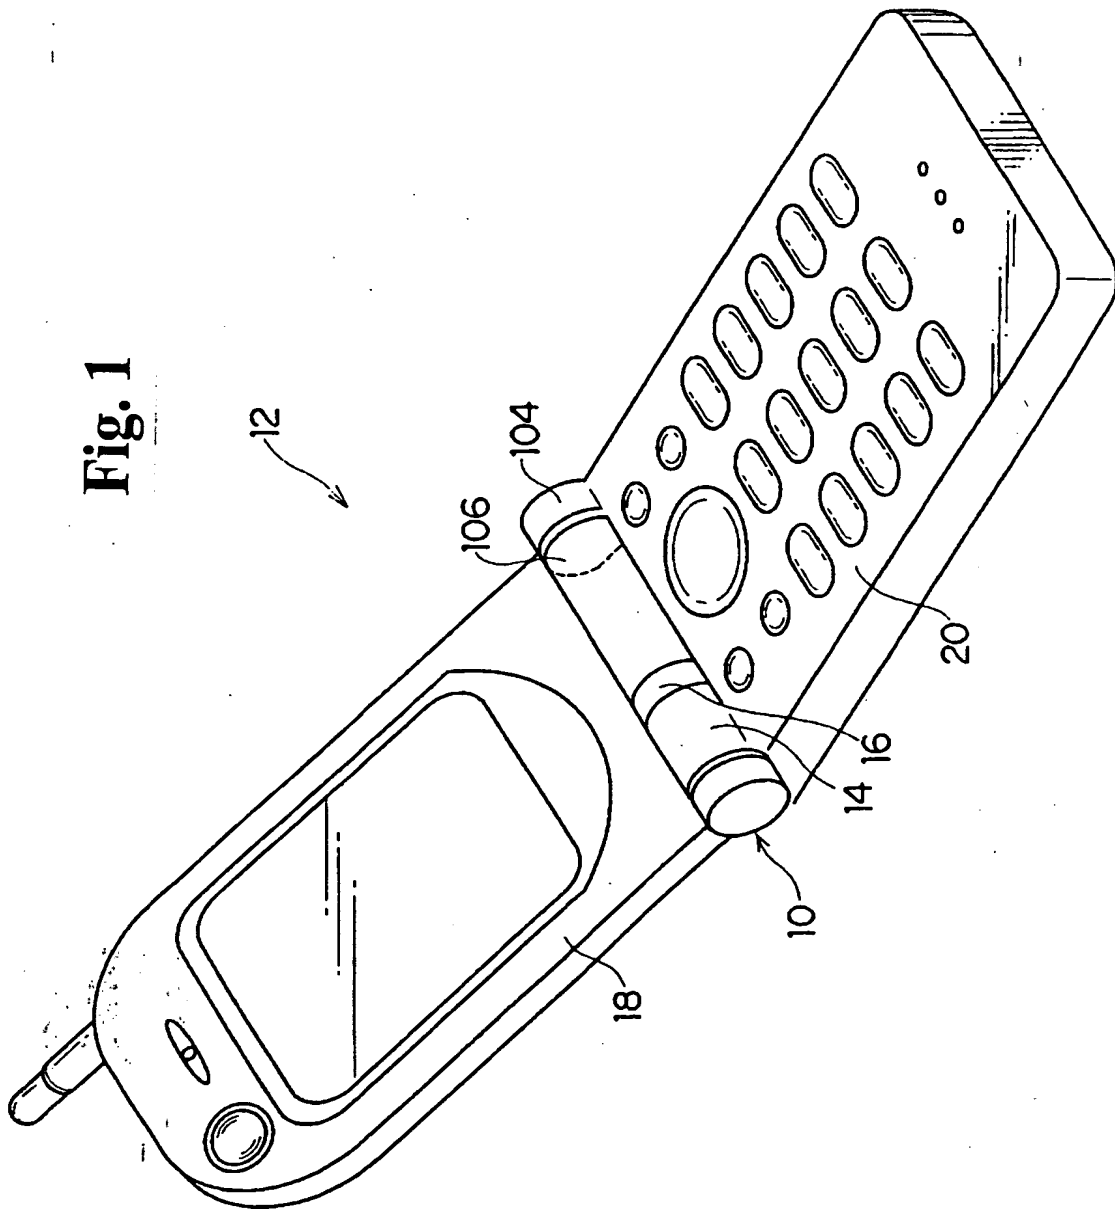


Fig. 2


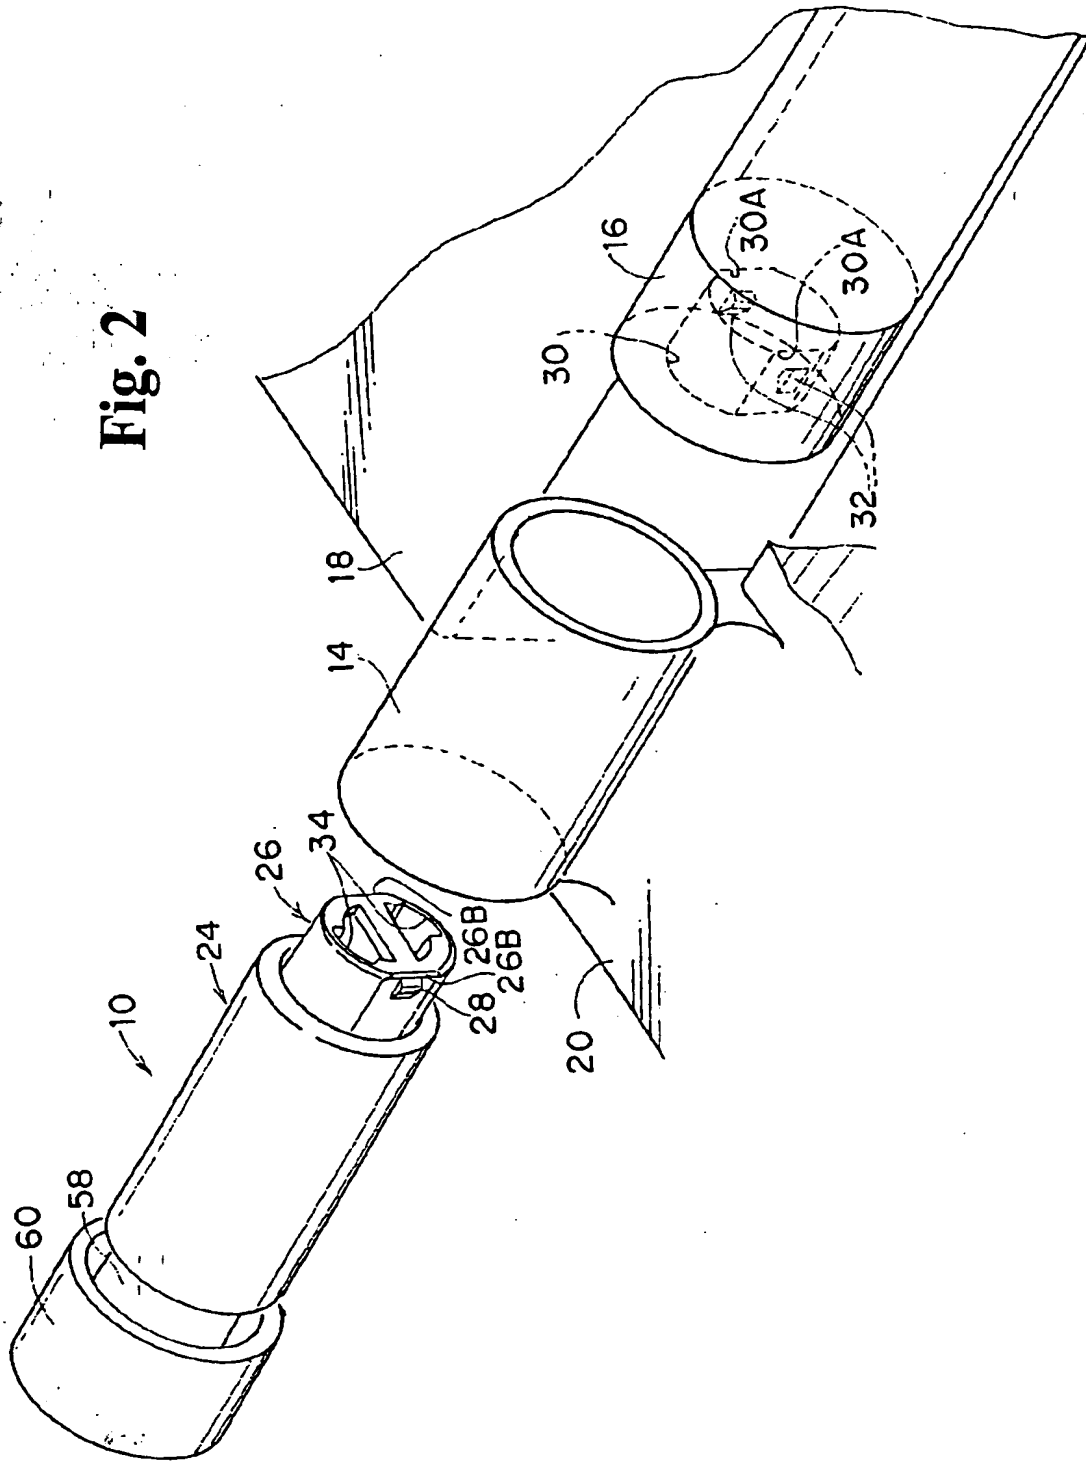


Fig. 3

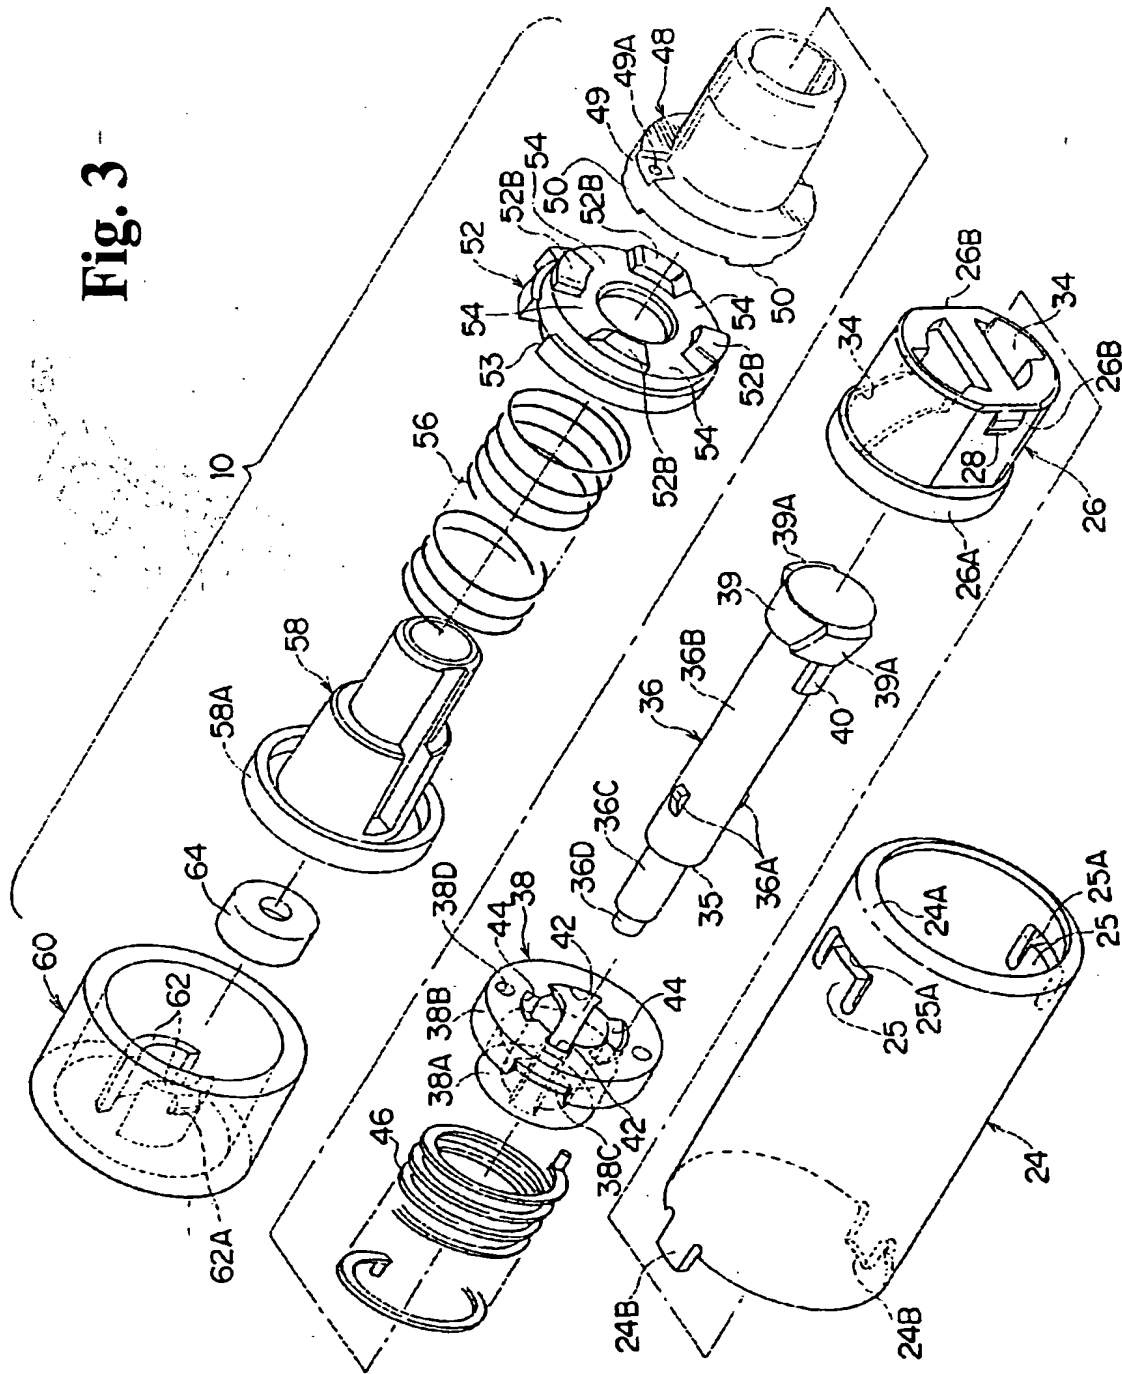

4/21

Fig. 4(A)

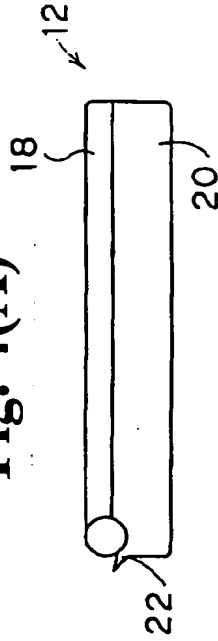


Fig. 4(B)

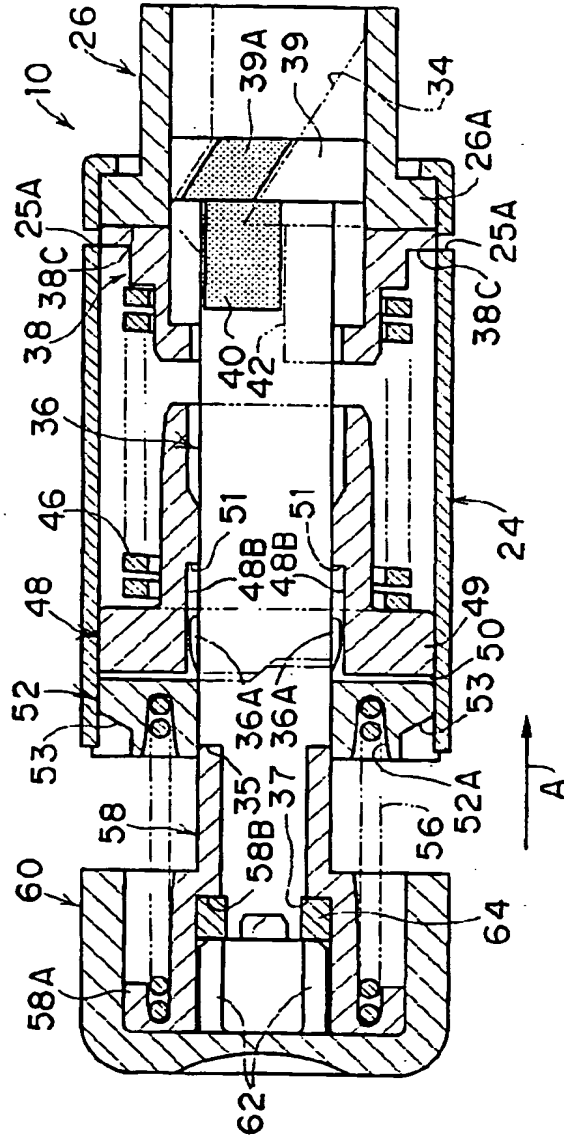


Fig. 4(C)


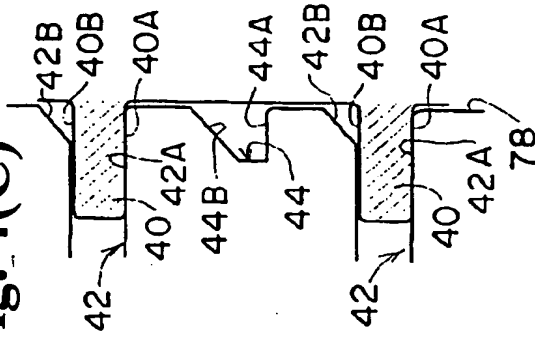


Fig. 4(D)

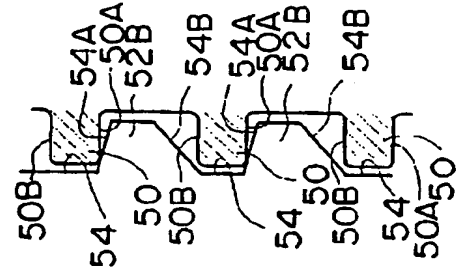

P-1555
8/21

Fig. 5(A)

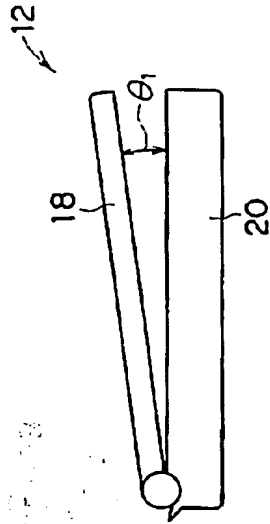


Fig. 5(B)

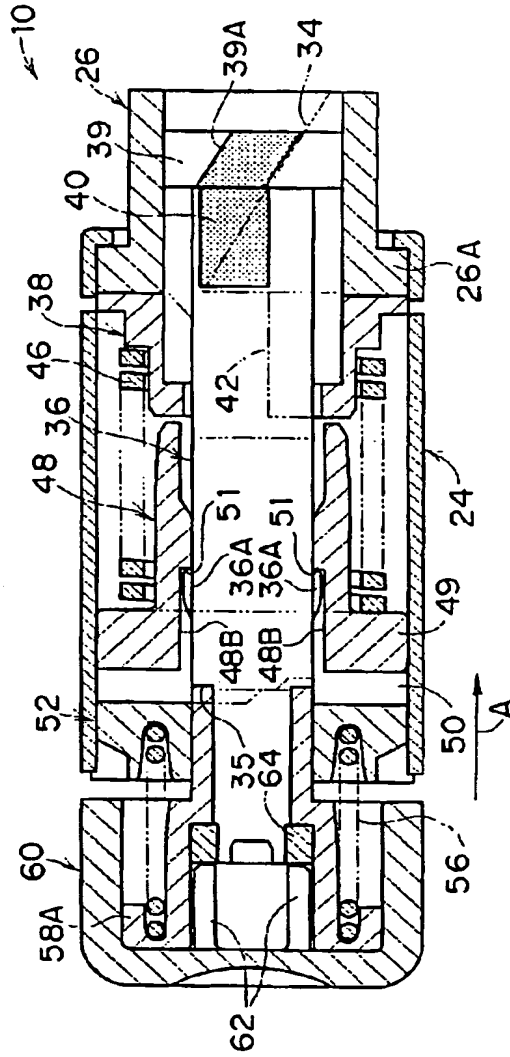


Fig. 5(C)

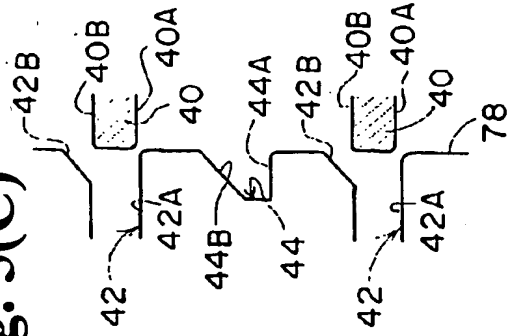


Fig. 5(D)

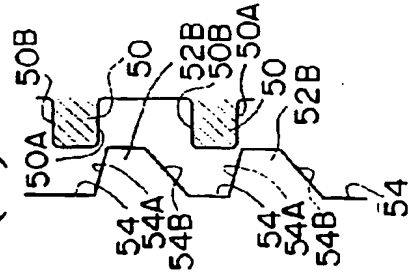


Fig. 7(A)

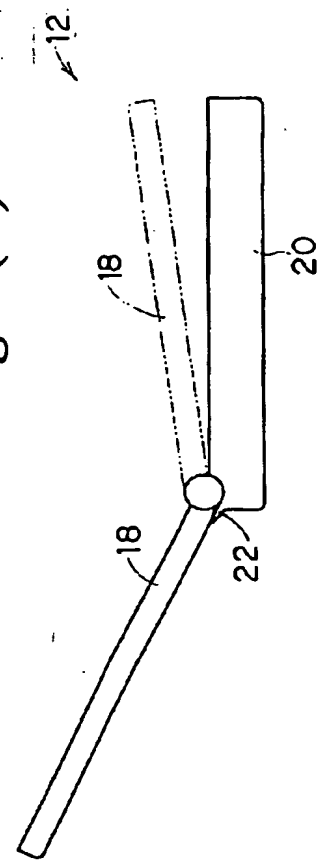


Fig. 7(C)

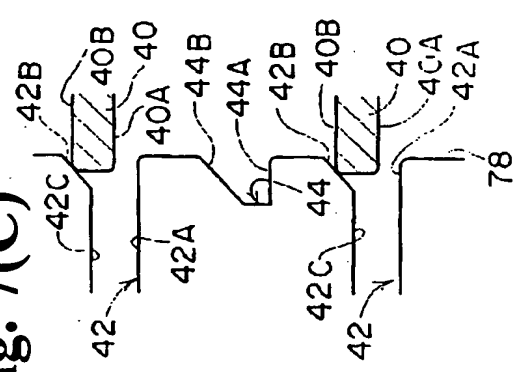


Fig. 7(D)


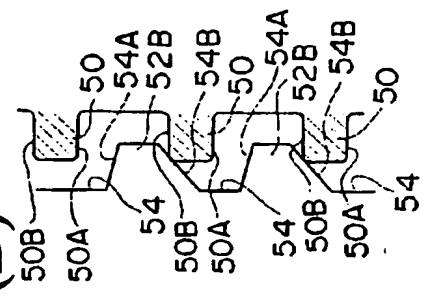


Fig. 7(B)

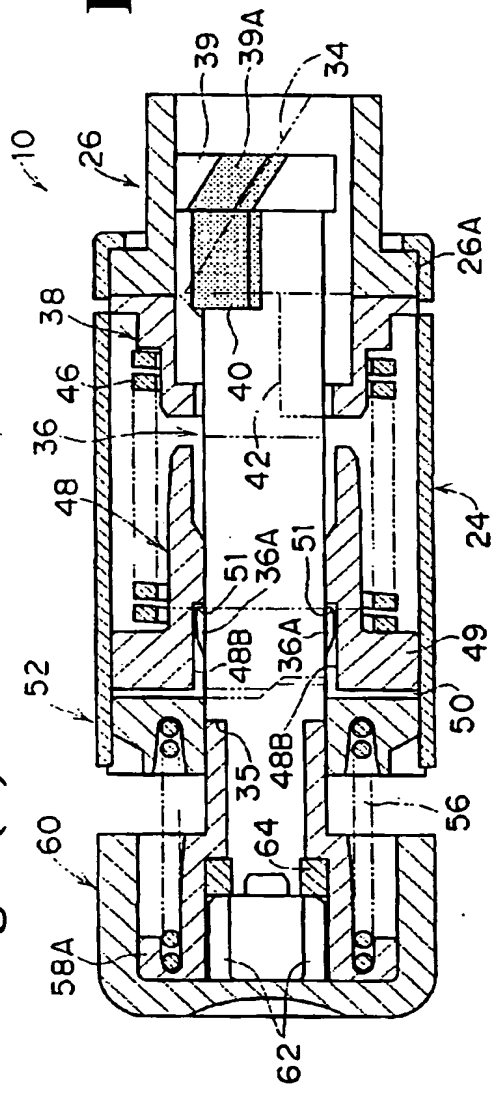

D 1555
8/21

Fig. 8(A)

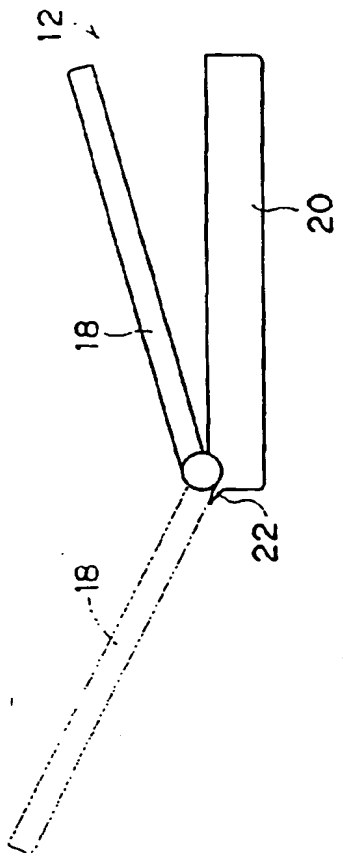


Fig. 8(C)

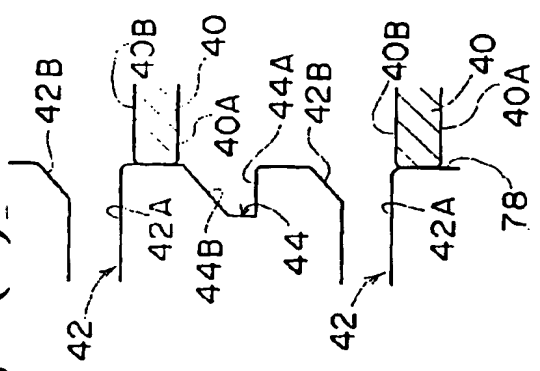


Fig. 8(D)

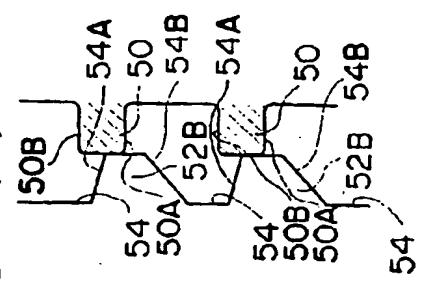


Fig. 8(B)




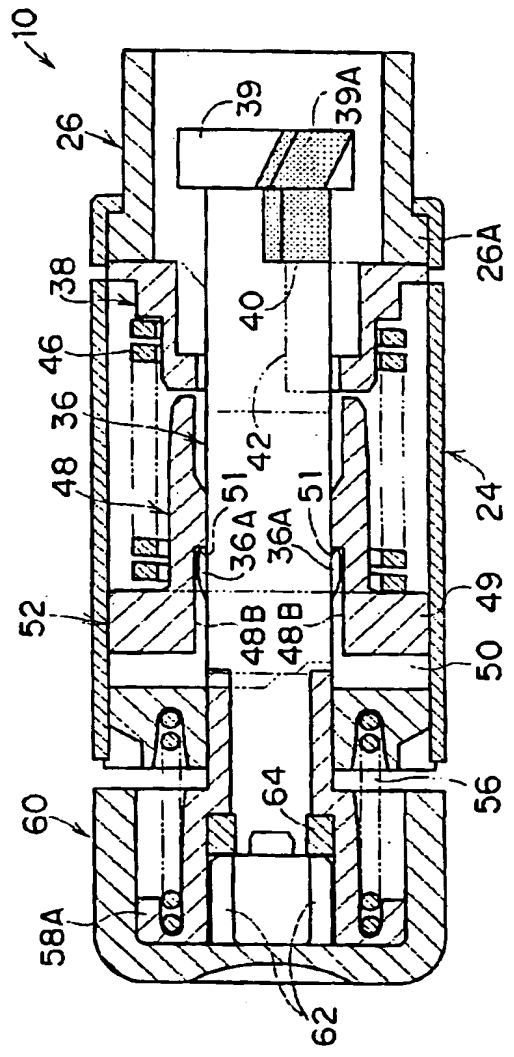


Fig. 9(A)**Fig. 9(B)**

D-1555

10/21

Fig. 10

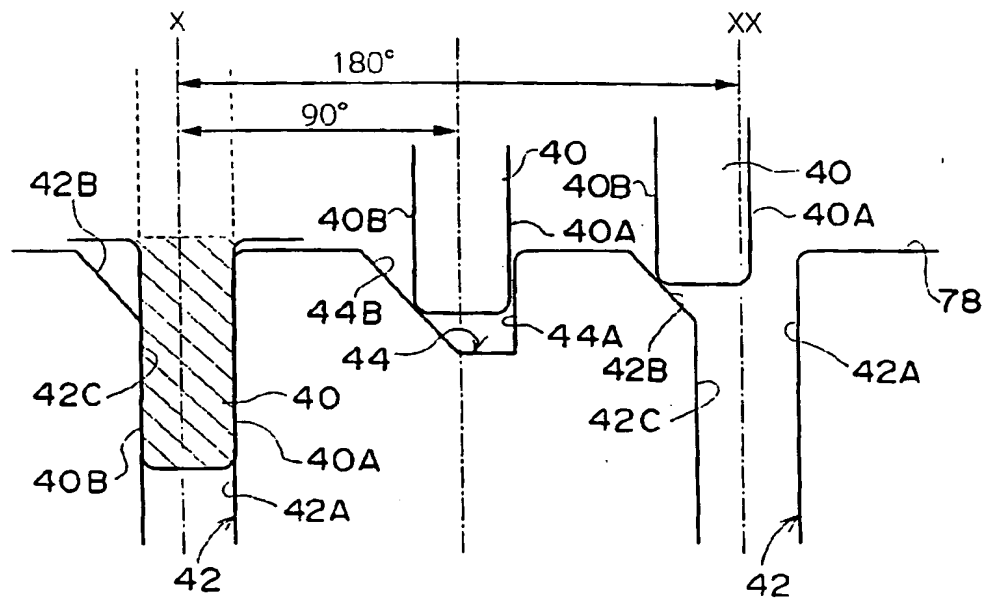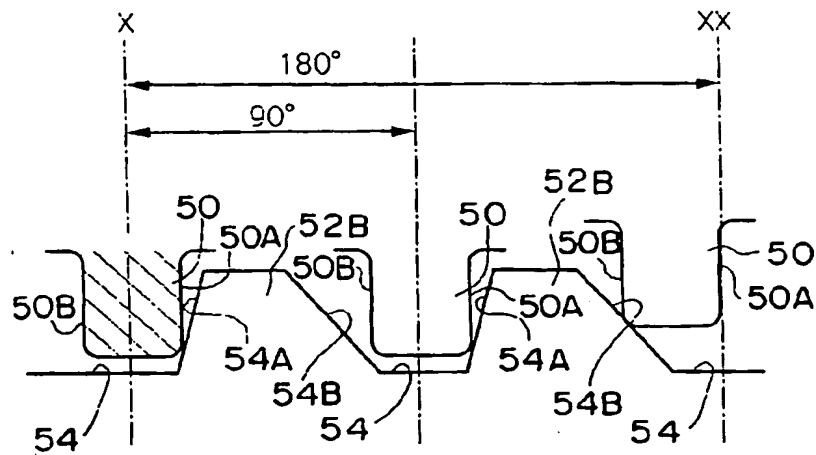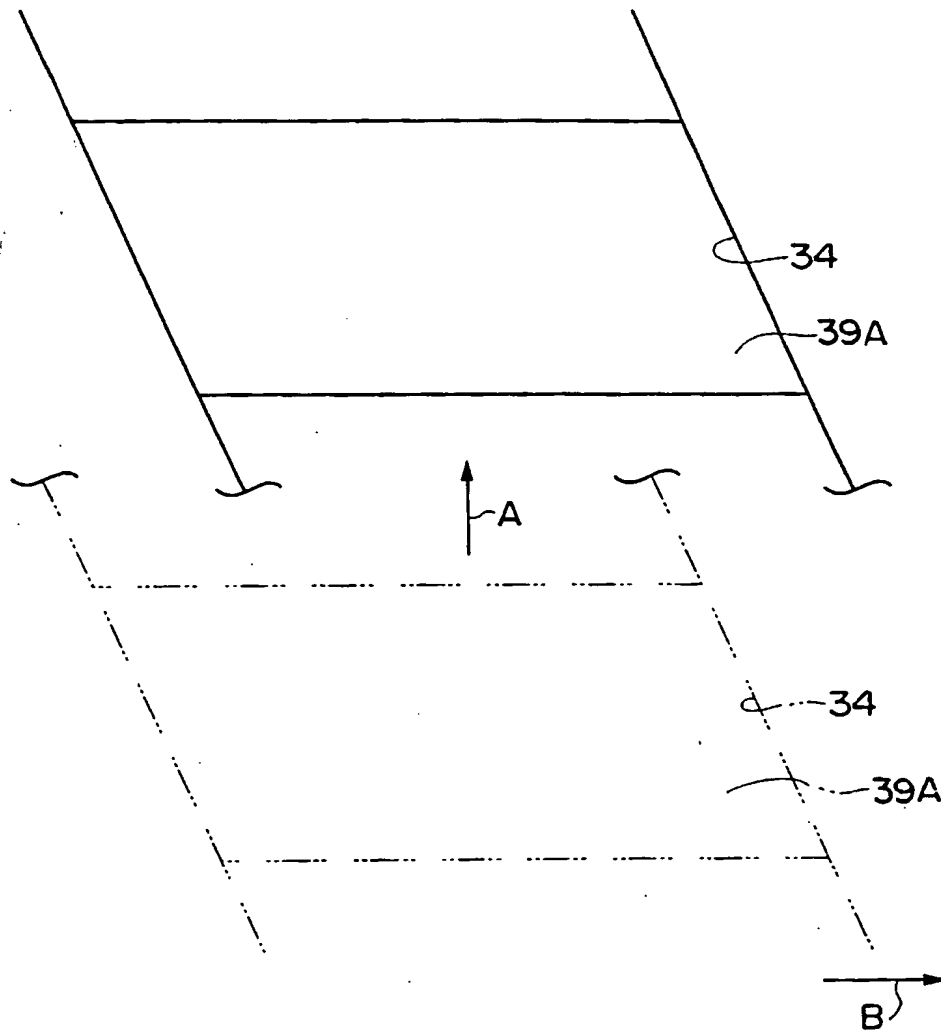

D-1555

11/21

Fig. 11(A)

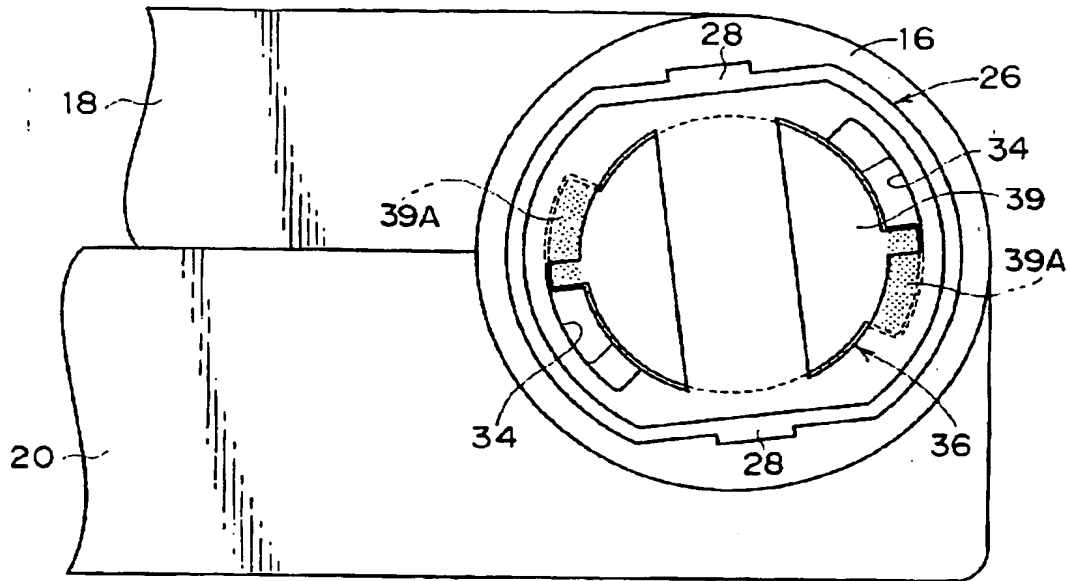


Fig. 11(B)



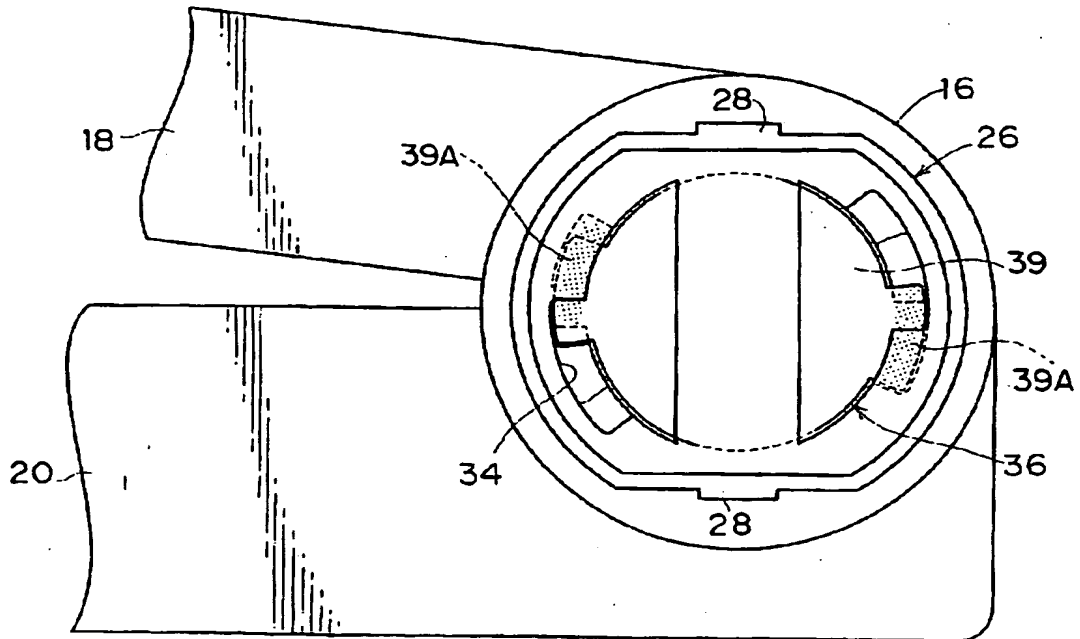


Fig. 12

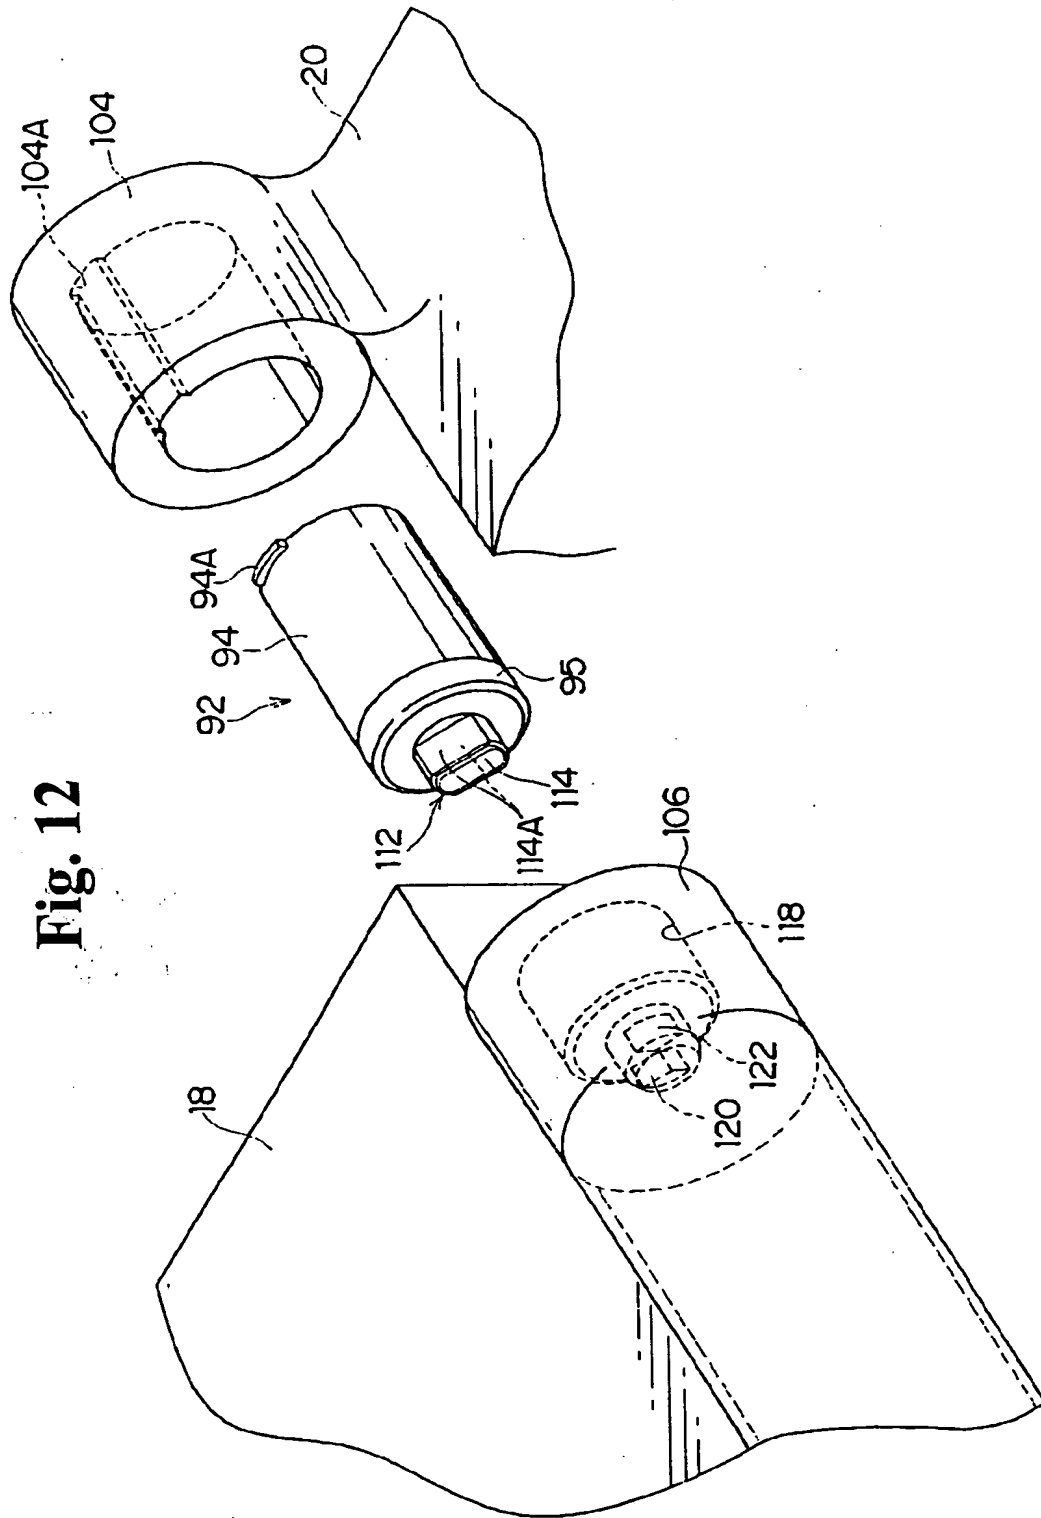

D-1555

13/21

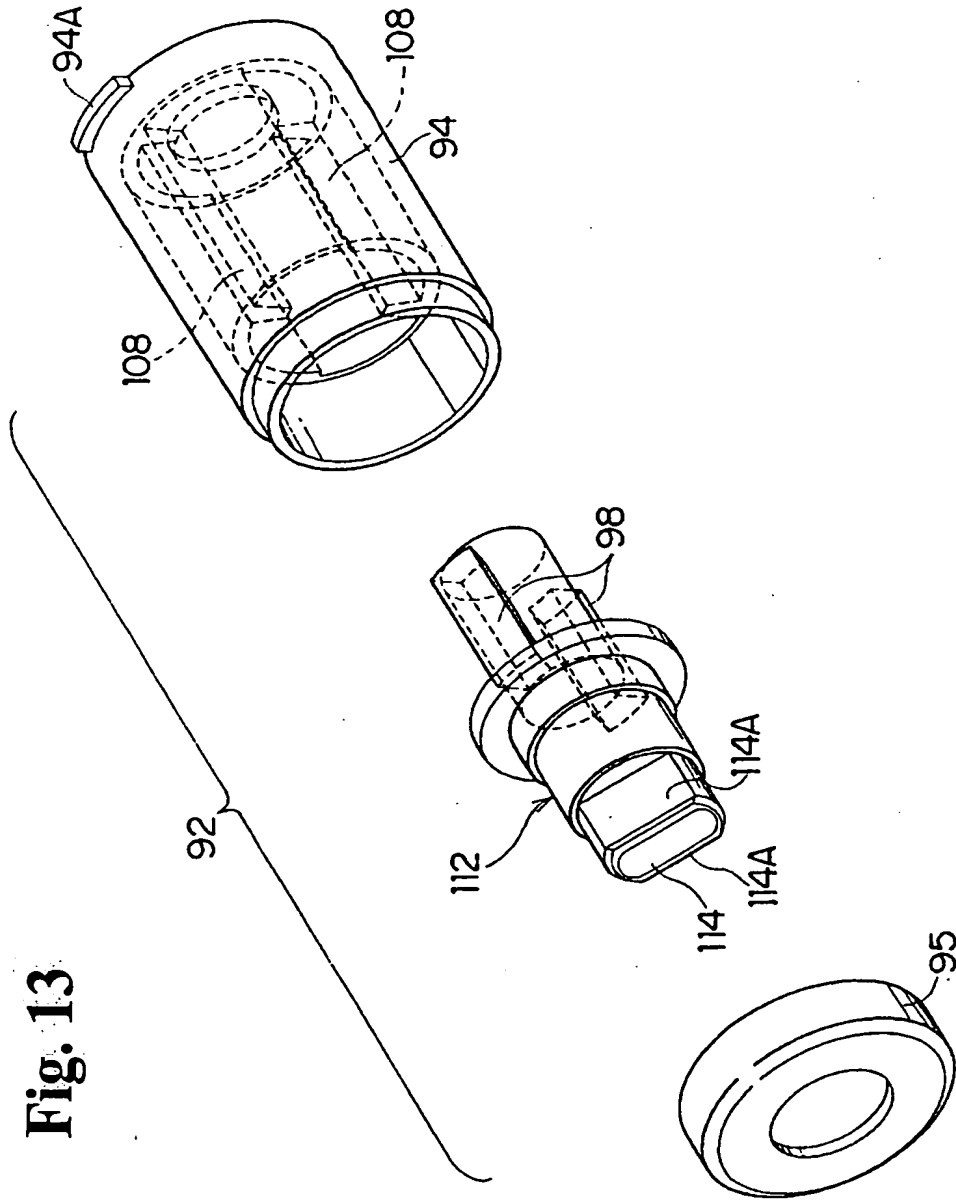

D-1555

14/21

Fig. 14(A)

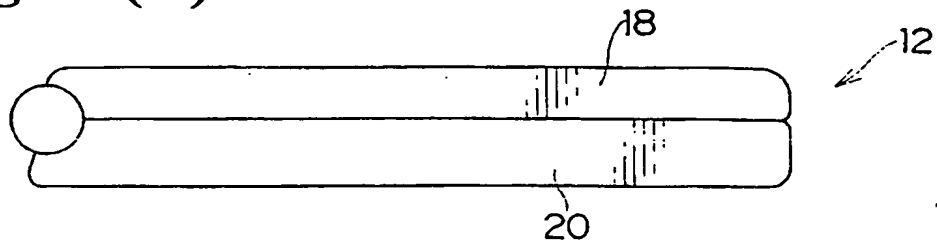


Fig. 14(B)


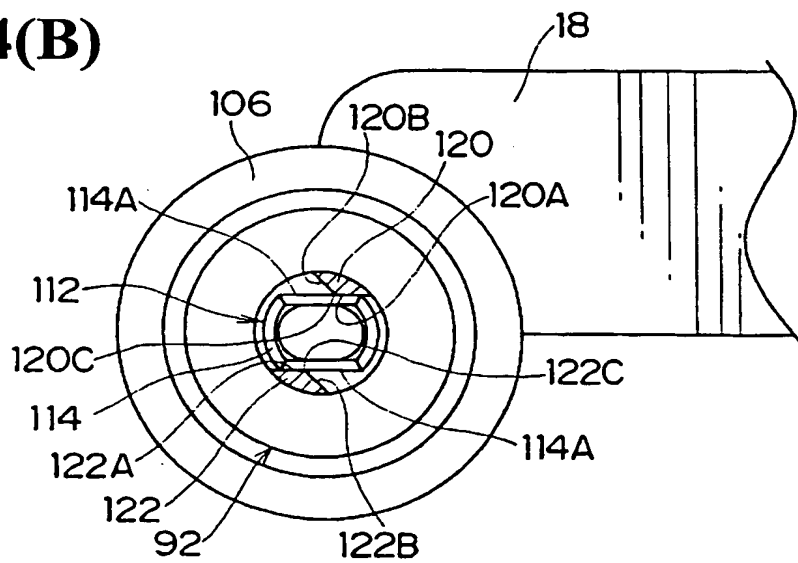


Fig. 14(C)

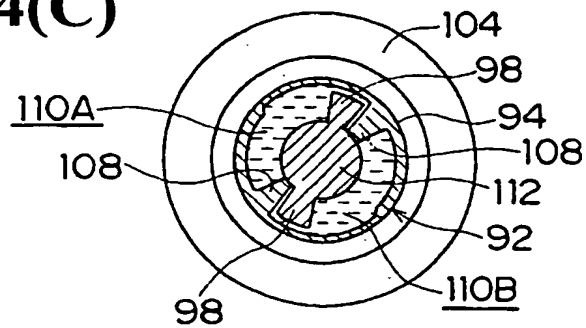

D-1555

15/21

Fig. 15(A)

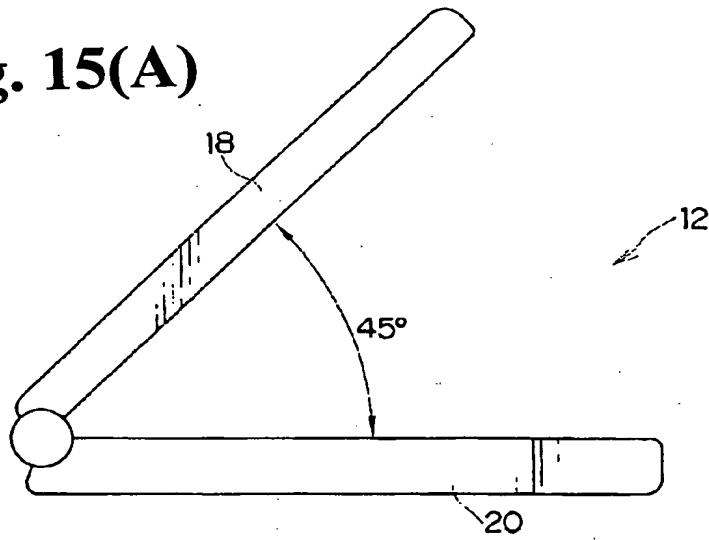


Fig. 15(B)

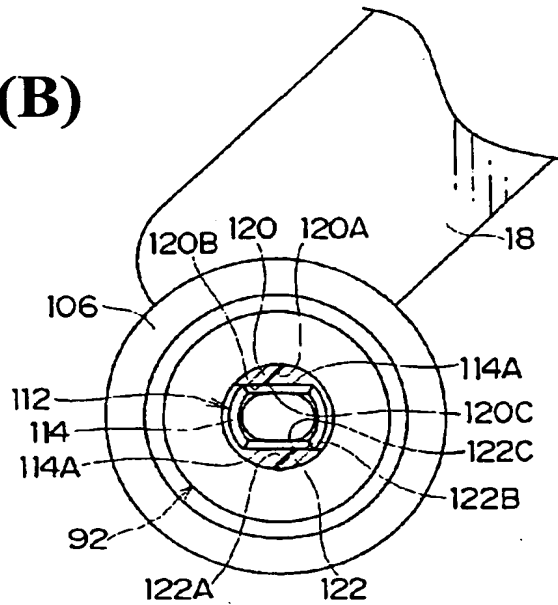


Fig. 15(C)

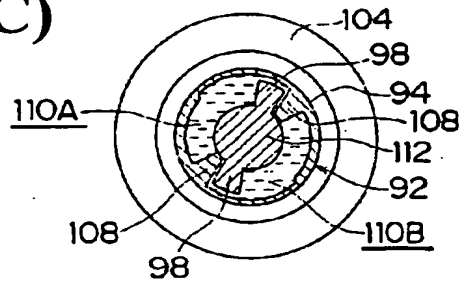


Fig. 16(A)

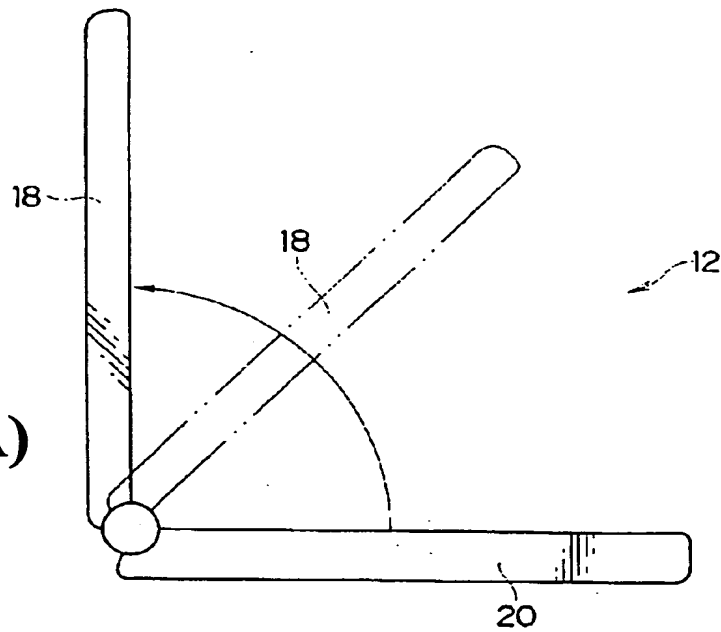


Fig. 16(B)

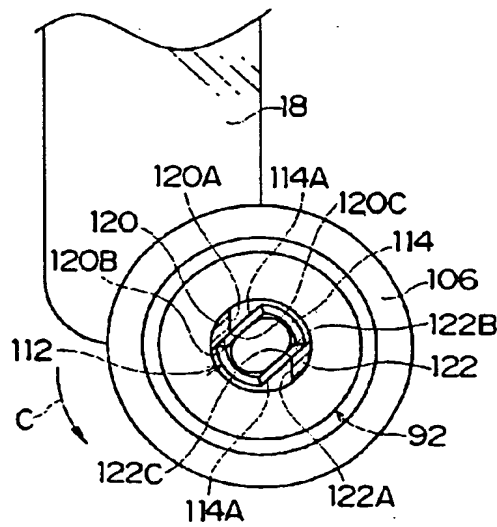


Fig. 16(C)

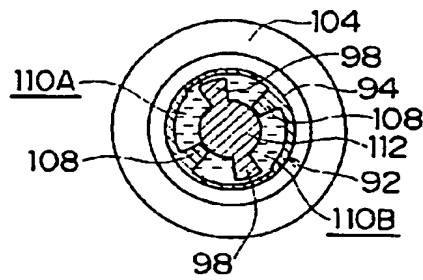
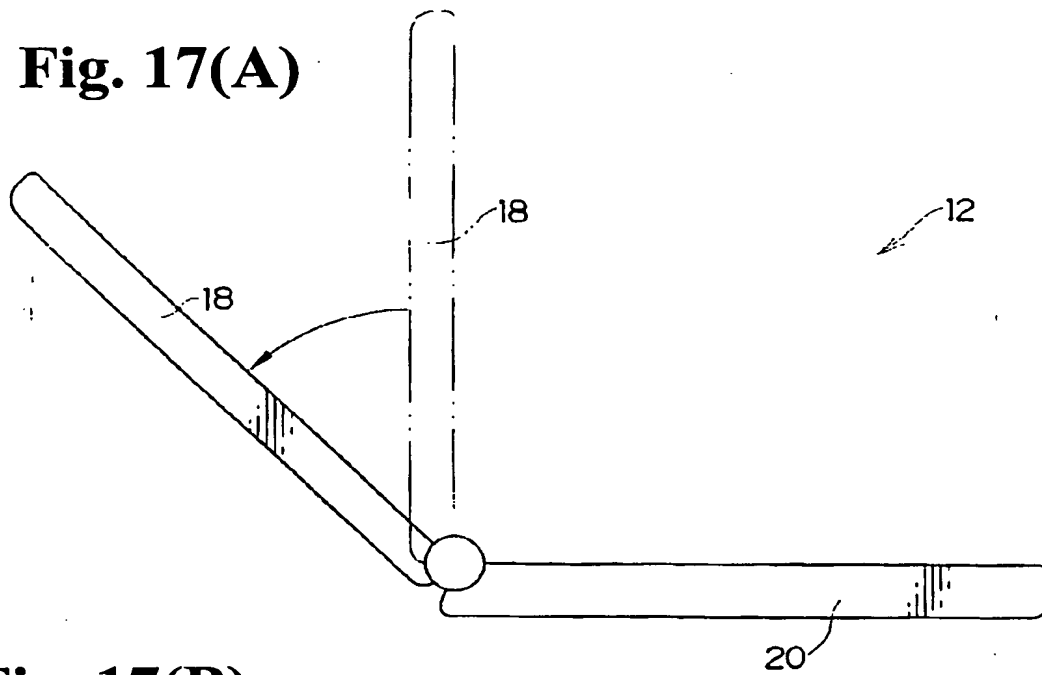
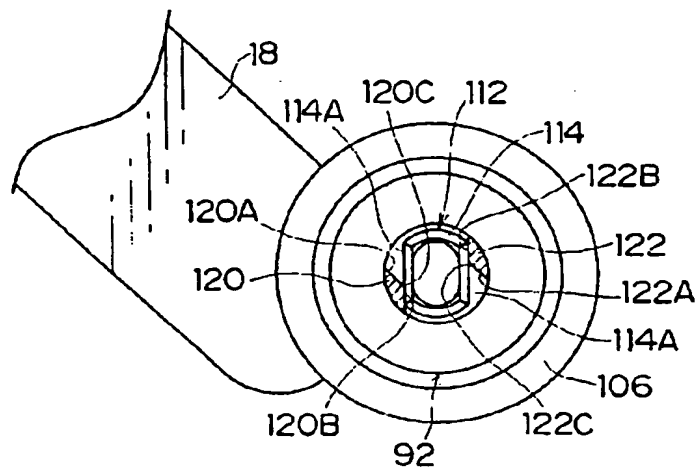
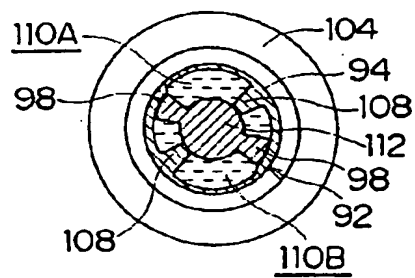


Fig. 17(A)**Fig. 17(B)****Fig. 17(C)**

D 1555

18/21

Fig. 18(A)

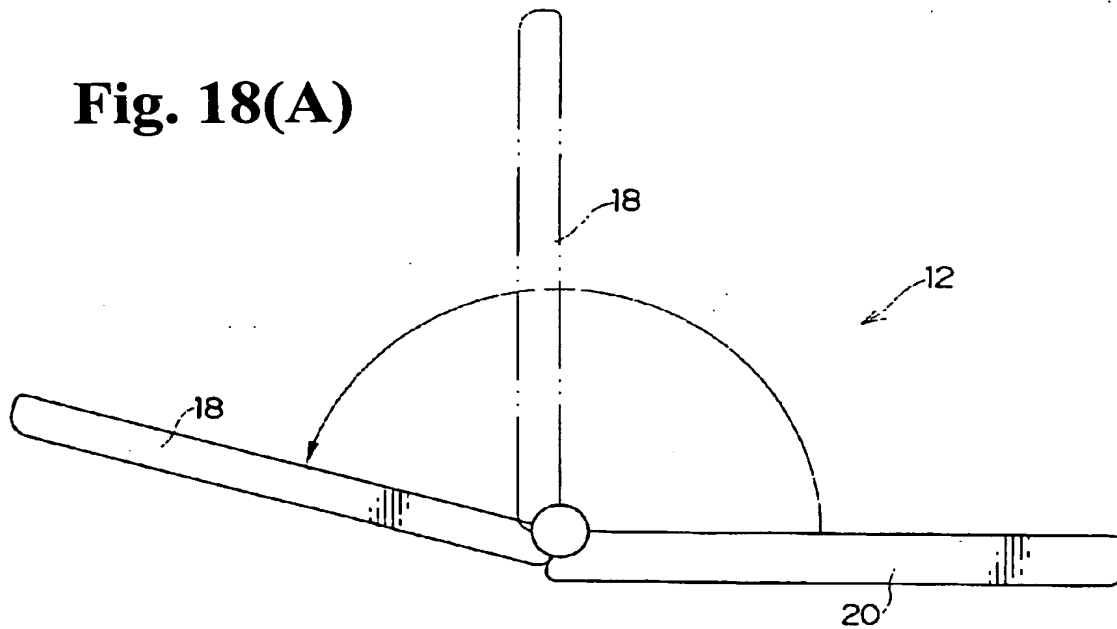


Fig. 18(B)


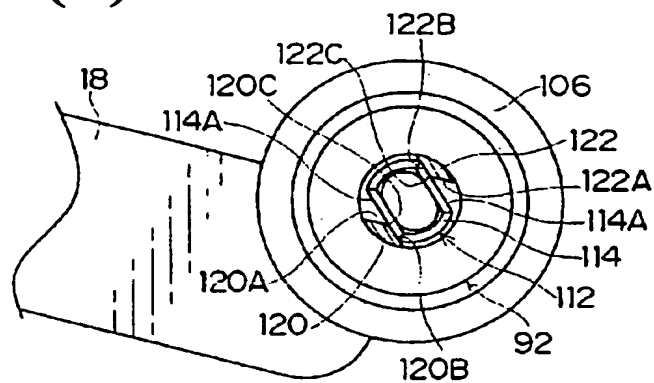


Fig. 18(C)

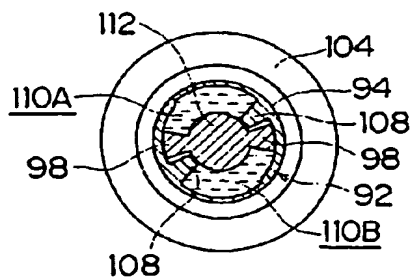

D-1555

19/21

Fig. 19(A)

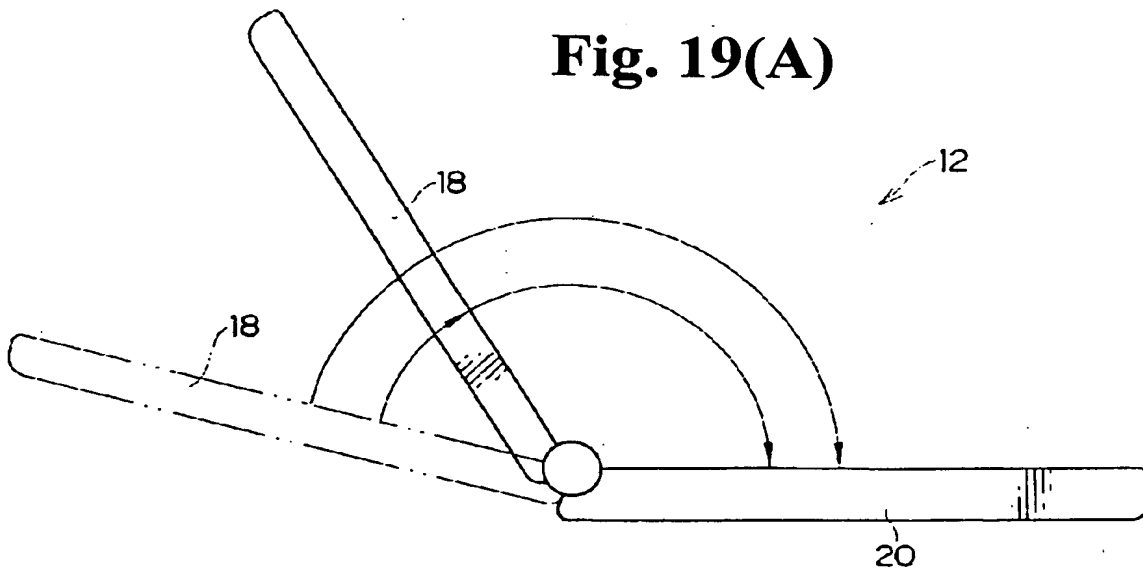


Fig. 19(B)

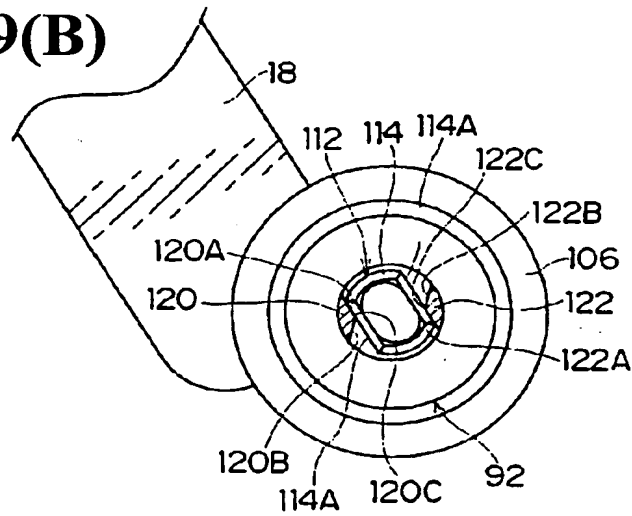
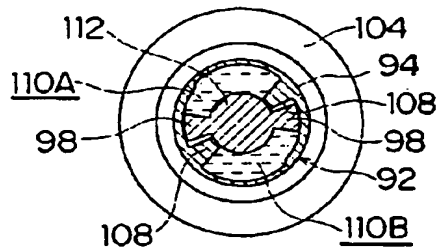


Fig. 19(C)



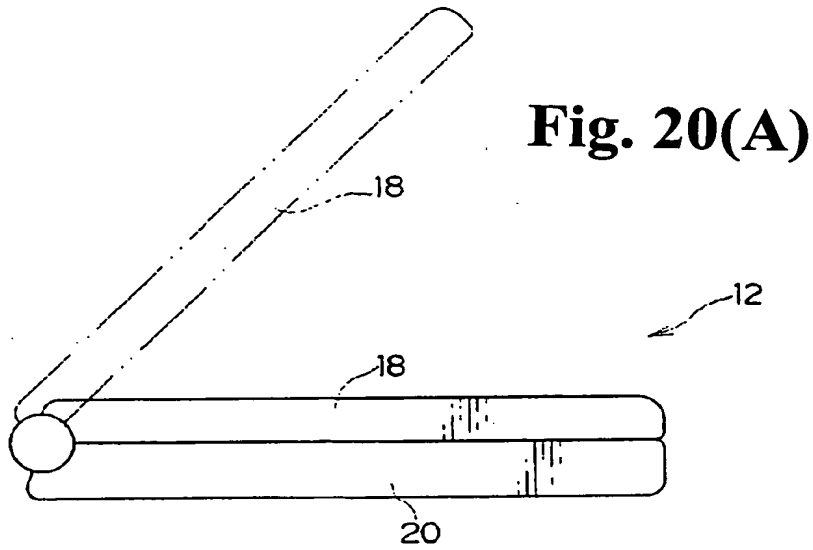


Fig. 20(B)

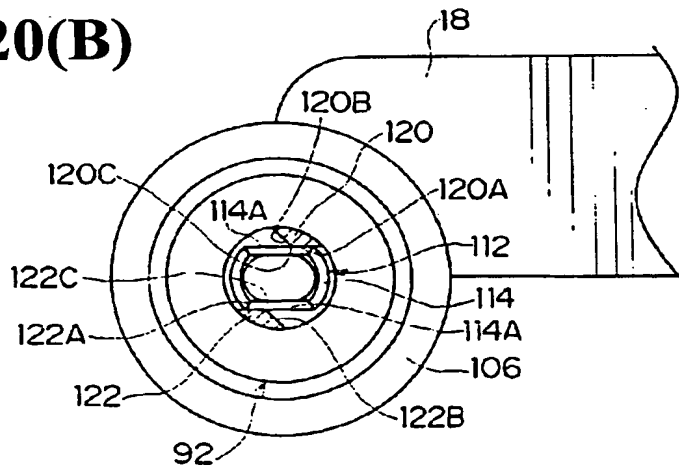


Fig. 20(C)

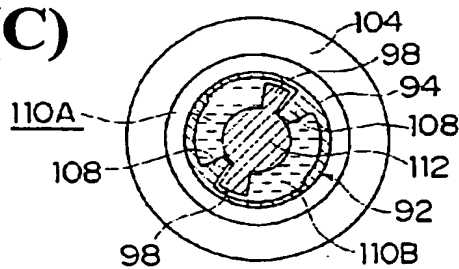


Fig. 1 is a perspective view of a cylindrical member 12. The member has a circular end face 18 and a longitudinal slot 20. The slot is defined by two parallel longitudinal edges and is open at both ends.